


B/W VIDEO INTERCOM MONITOR

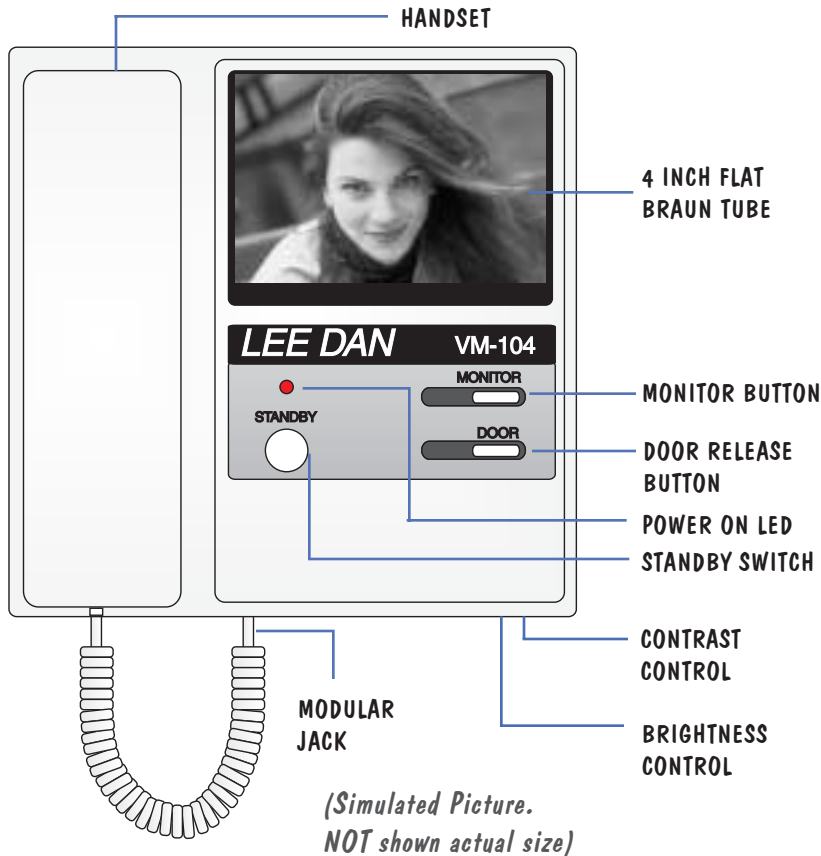

APPLICATION

The *ENTERVIEW™* VM-104 video intercom monitor is the best device for identifying visitors to your home or building.

Visitors call from the front door on a vandal-resistant camera lobby panel. Residents have the privacy of screening calls *before* answering. If they choose to, residents may speak with the visitor to further identify them, or ask them to step in front of the camera if they are not visible.

Enjoy the security of watching unwelcome visitors leave.

Contemporary styling, in soft white with pleasing lines, compliments most decors.

Advanced circuitry and simple pushbutton operation make this the perfect station for use in apartment buildings, offices and private homes.

SPECIFICATIONS

- Size:** 8 1/4"H, 7 3/8"W, 2 1/4"D. Projects only 2 3/8" from mounting surface.
- Handset:** Amplified duplex handset provides simultaneous Talk and Listen to calling entrance. 6' coil cord. Modular connector plugs into monitor for quick testing.
- Controls:** Door Release button activates door opener. Monitor button turns monitor on from suite. Contrast control. Power-on LED. Brightness control. Standby switch.
- Video:** 4" flat Braun tube. 3 3/4" viewing area provides outstanding, image viewing.
- Finish:** High impact ABS plastic.
- Color:** Soft white, with black imprinting.
- Speaker:** 1 3/4", .2 Watt, 8 Ohm. Heavy duty magnet with natural voice reproduction. Also used for tone signal from the lobby camera panel.
- Amplifier:** Use Lee Dan model PK-314A.

Wiring Requirements

RG-59U coaxial cable (common), plus 3 #18 gauge (common), plus 2 twisted pair #22 gauge (common), plus 1 #22 gauge selective.

Use all of the following cables together:


- RG-59U 75 Ohm Coaxial Cable.
- 318/2PRJ 3 conductor #18 gauge, with 2 twisted pairs #22 gauge.
- 3PRJ 3 twisted pair #22 gauge. Suitable up to 6 apartments per riser. Contact Lee Dan for cable models over 6 apt's per riser.

Note: It is *always* advisable to run spares!

Mounting Methods

- IH-357 Flush ring. Mounts to drywall or IH-358.
- IH-358 Flush double gang box for IH-357 ring.

VIDEO INTERCOM USER GUIDE

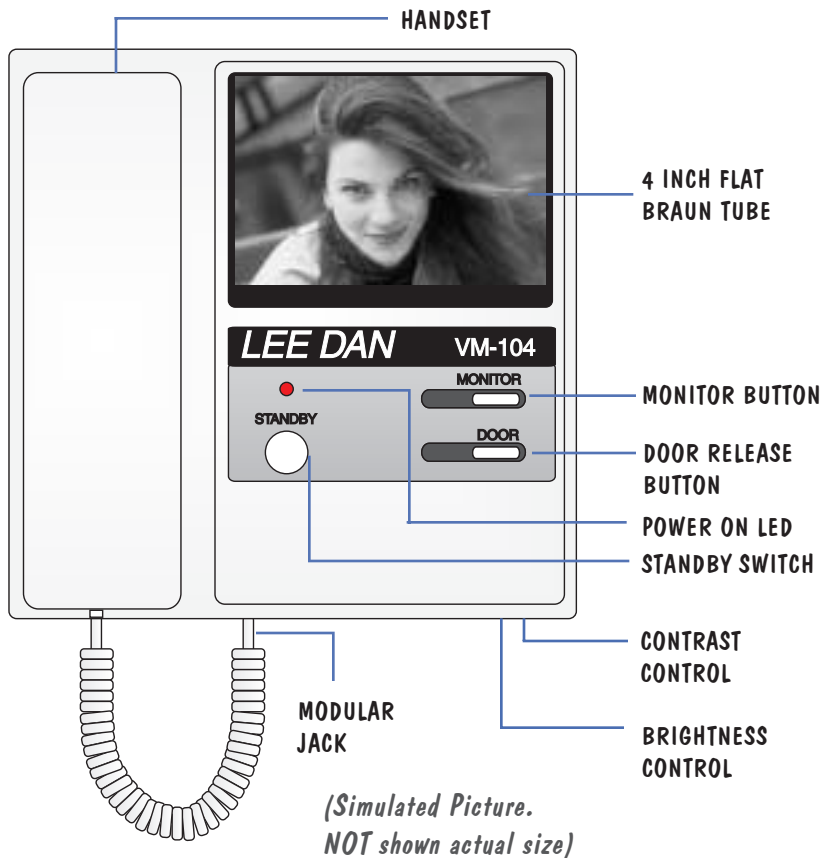

APPLICATION

The *ENTREVIEW™* VM-104 video intercom monitor is the best device for identifying visitors to your home or building.

Visitors call from the front door on a vandal-resistant camera lobby panel. Residents have the privacy of screening calls *before* answering. If they choose to, residents may speak with the visitor to further identify them, or ask them to step in front of the camera if they are not visible.

Enjoy the security of watching unwelcome visitors leave.

Contemporary styling, in soft white with pleasing lines, compliments most decors.

Advanced circuitry and simple pushbutton operation make this the perfect station for use in apartment buildings, offices and private homes.

SPECIFICATIONS

Size: 8 1/4"H, 7 3/8"W, 2 1/4"D. Projects only 2 3/8" from mounting surface.

Handset: Amplified duplex handset provides simultaneous Talk and Listen to calling entrance. 6' coil cord. Modular connector plugs into monitor for quick testing.

Video: 4" flat Braun B/W tube. 3 3/4" viewing area provides outstanding image viewing.

Finish: High impact ABS plastic.

Color: Soft white, with black imprinting.

Speaker: 1 3/4", .2 Watt, 8 Ohm. Heavy duty magnet with natural voice reproduction. Also used for tone signal from the lobby camera panel.

Controls: Door Release button activates door opener. Monitor button turns monitor on from suite. Contrast control. Power-on LED. Brightness control. Standby switch.

USER INSTRUCTIONS

At Entry Panel:

1. Momentarily press button corresponding to desired suite.
2. Reply in a normal voice when spoken to. Visitor reply at panel is hands free.
3. When door release buzzes, enter through door.

At VM-104 Monitor:

1. You will hear a call tone when a visitor presses your button at the front entry panel.
2. View visitor on video screen as you approach monitor. Adjust picture brightness and contrast as necessary using slide control switches as indicated in the illustration above.
3. Pick up intercom handset. Speak to your visitor in a normal voice. Make sure you positively identify all visitors *before* activating door release... or do **not** open door!
4. The door may be opened by pressing the door release button marked 'Door'.

Notes: VM-104 stays on for approximately 1 minute when called. Picture is delayed approximately 3-5 seconds. When the door release is activated or when a second caller rings another suite, the VM-104 will shut off.

Calls may be initiated from the VM-104 by pressing the 'Monitor' button. This activates the camera and may be used to reactivate a call that has been canceled or to monitor the camera panel up to 1 minute.