

GH-MK

Concierge Station for the GH Series



DESCRIPTION:

The GH-MK is a concierge station for the GH Series multi-tenant system. The unit surface mounts to a single gang electrical box or may be desk mounted using an optional desk stand (GFW-S). The GH-MK features a 10-key keypad for calls to both tenant stations and entry panels and a handset for private communication. The unit also has up/down buttons for name scrolling and a door release button to selectively open each entrance.

The GH-MK has two calling modes, standard (via tenant station) and emergency (via GFK-PS). When a standard call is placed, a normal call tone is heard and the calling unit's name and number are steady on the LCD screen. When the emergency call is placed, an urgent call tone is heard, the calling unit's name and number flash on the LCD screen intermittently with "EMERGENCY". A standard call is reset by hanging up the GH-MK handset, and emergency call must be reset at the tenant location.

The GH-MK can be manually programmed or programmed via PC using the supplied connector. A standard GH system will support 2 GH-MK while an expanded system will support 4 GH-MK.

The system has one talk path. When the system is occupied, a busy tone will be heard if another call is attempted.


FEATURES:

- Handset for private communication
- Standard and emergency calls
- Communicate to entry panels and tenants
- Visitor Screening
- Caller ID with Call Back
- Full System Connectivity
- Input for an optional doorbell button
- Service button (requires #238400 connector)
- External Signaling Device (requires GH-RY and #238400 connector)
- Wall mount to a 1-gang box or desktop mount using the GFW-S stand.

GH-MK

Concierge Station for GH Series

FEATURE CALL-OUTS:

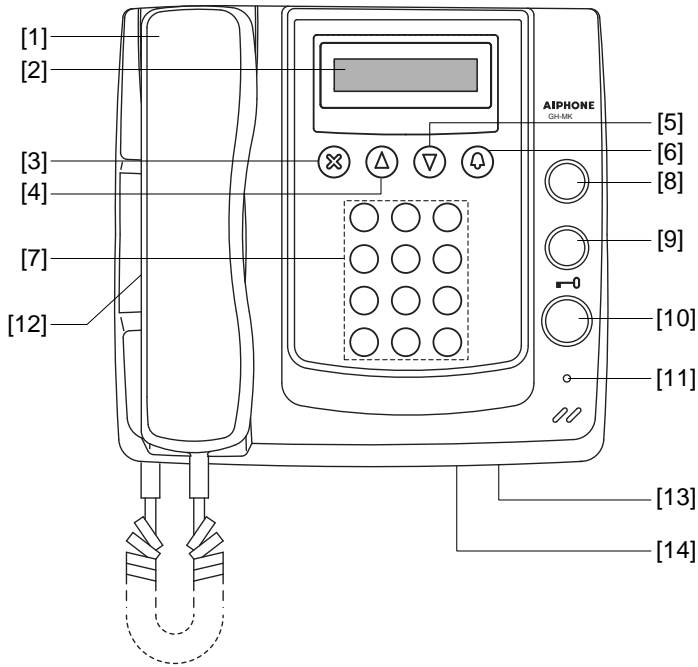

GH-MK with GFW-S desk stand:



FEATURE CALL-OUT DEFINITIONS:

- [1] Handset
- [2] Display
- [3] Cancel button (or set and return)
- [4] Back search button (or move cursor to the left)
- [5] Forward search button (or move cursor to the right)
- [6] Call button (or set and move forward)
- [7] 10-key (0 ~ 9, *, #)
- [8] Service button
(Option, additional parts and modification required)
- [9] Light button
- [10] Door release button
- [11] Off hook LED
- [12] Speaker (under handset)
- [13] Call tone volume control
- [14] RS-232 connection, 3.5 mm port

SPECIFICATIONS:

- Power Source: 24V DC, PS-2420UL per 2 units
- Call: Varying ring tones from entrance panel, tenant station, or doorbell
- Communication: Handset for privacy
- Capacity: Max 2 GH-MK in a standard system
Max 4 GH-MK in an expanded system
- Wiring: 2-conductor, PE insulation, common bus
Aiphone #872002, 2 cond. PE insulated, non-shielded, 11.05 pf/ft
- Wiring Distance: GH-BC to farthest GH-MK (Audio line): 980' with 20AWG
- Talk Path: Single channel with privacy
- Operating Temp: 32 – 104° F (0 ~ 40° C)
- Dimensions (HxWxD): 8-1/4" x 8-7/16" x 2-3/4"
(210 x 215 x 69 mm)
- Weight: 2.0 lbs (900g)