

RY-PA-10

10 Relay Adaptor

DESCRIPTION:

The RY-PA-10 is a relay adaptor designed with 10 relay outputs for use with the LEF, LDF and NDR systems. The relays can be wired for Normally Open (N/O) and/or Normally Closed (N/C) output contacts.

The RY-PA-10 is ideal for systems providing selective door release, CCTV camera call-up or a combination of both.

FEATURES:

- Ten relays built into one unit for easy installation
- Can be used with LEF, LDF and NDR systems
- Relays are individually controlled with momentary or maintained inputs
- Normally Open and Normally Closed outputs available for each relay
- Electric strikes or maglocks can be used for selective door release applications
- Each relay can be used for both camera call-up and selective door release

RY-PA-10**SOME APPLICATIONS:**

Multiple door entry or CCTV surveillance for a variety of applications:

- Offices
- Secured Departments within a Commercial or Institutional Facility
- Hotel and Motel Entries
- Medical Offices
- Gated Entries

SPECIFICATIONS:

Power: Provided by system

Relay Contacts: 0.6A at 125V AC; 2A at 30V DC.

Wiring: RY-PA-10 to Master: 1 common wire plus 1 wire for momentary contact, 1 for maintained.

RY-PA-10 to Strike or Switcher: 2 conductors per contact

Wiring Distance: Max. 65' from master station with 22AWG wire

Mounting: Shelf mount

Dimensions: 2-11/16"H x 8-1/16"W x 3-15/16"D

RY-PA-10 10 Relay Adaptor

The RY-PA-10 is used with the following systems

SPECIAL ORDER PRODUCTS:

NDR Series:

Master Stations

NDR-10	10-call Master w/selective outputs
NDR-10A	10-call Mstr. w/hndst. & sel.outputs
NDR-20	20-call Master w/selective outputs
NDR-20A	20-call Mstr. w/hndst. & sel.outputs
NDR-30	30-call Master w/selective outputs
NDR-30A	30-call Mstr. w/hndst. & sel.outputs
NDR-40	40-call Master w/selective outputs
NDR-40A	40-call Mstr. w/hndst. & sel.outputs

LDF Series:

Master Stations

LDF-20C	20-call Master station
LDF-20CA	20-call Master station w/handset
LDF-40C	40-call Master station
LDF-40CA	40-call Master station w/handset

Add-on Selectors

LD-20AS	20-call Add-on selector
LD-40AS	40-call Add-on selector


Add-on Selectors

ND-20AS	20-call Add-on selector w/sel.outputs
ND-40AS	40-call Add-on selector w/sel.outputs

STOCK PRODUCTS:


LEF-5	5-call Master station
LEF-5C	5-call Master station, semi-flush
LEF-10	10-call Master station
LEF-10S	10-call Master station w/All Call btn.
LEF-10C	10-call Master station, semi-flush

LEF SYSTEM LAYOUT EXAMPLE: Selective Door Release

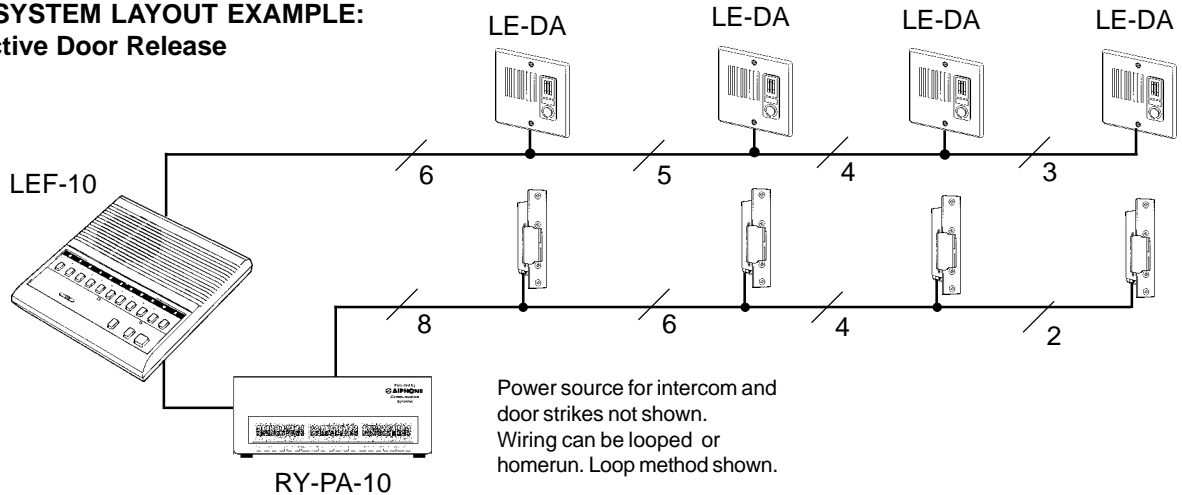

NDR SYSTEM LAYOUT EXAMPLE: Camera Call-up

(Loop wiring method shown.
Otherwise, homerun 2 conductors from each remote.)

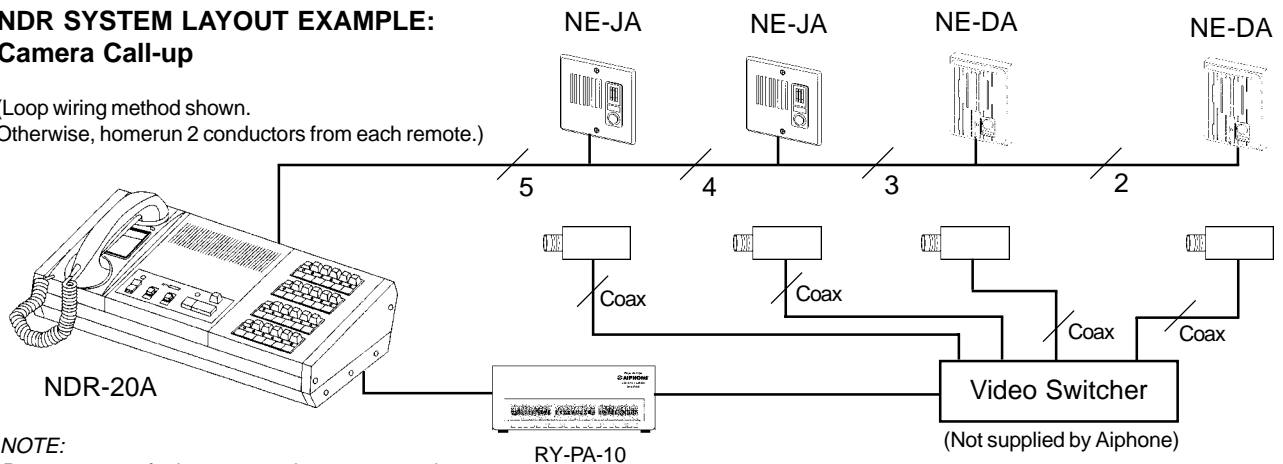

NOTE:
Power sources for intercom and cameras not shown.