

'3311' REPLACEMENT APARTMENT STATION

APPLICATION

The IR-086S is an economical apartment intercom station designed specifically for replacement of Auth model '3311' stations.

The IR-086S is large enough to cover the area occupied by most previous units, minimizing labor and making repainting unnecessary.

Contemporary styling, featuring fog white color and pleasing lines, compliments most decors.

Specifications

Size: 6 7/8"H, 6 1/4"W, 1 3/4"D. Projects only 3/8" from mounting surface.

Controls: Individually replaceable Talk, Listen and Door Release buttons with self-wiping, plated contacts.

Finish: White powder coated steel.

Speaker: 3 1/2", 1 Watt, 45 Ohm. Heavy duty magnet with voice-frequency response. Also used for electronic tone signal from the lobby panel.

Color: Fog white, with black imprinting.

Amplifier: Use existing Auth amplifier.


Wiring Requirements

6 Wires. Use existing wiring if electrically sound.

Mounting Method

Mounting holes are positioned to accommodate an existing surface or flush back box.

Includes 1 1/2" Scrulox mounting screws.

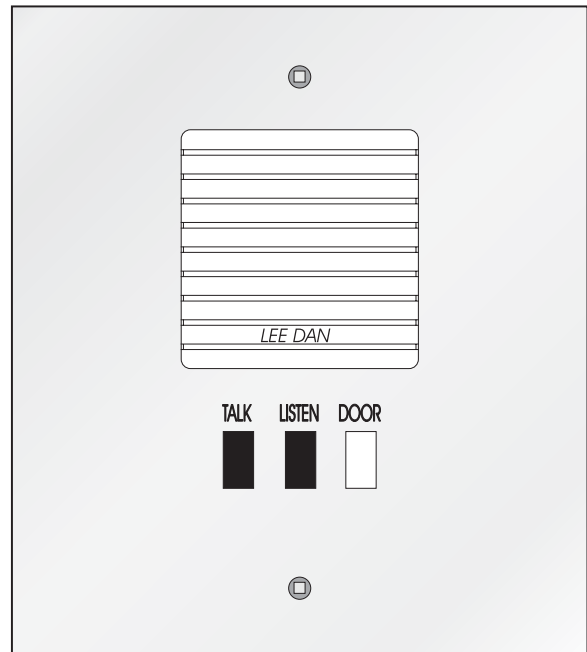

(shown smaller than actual size)

Architects' & Engineers' Specifications:

Suite stations shall be **LEE DAN**® model IR-086S or approved equal and shall be large enough to cover the area occupied by the previous intercom. Momentary action pushbuttons shall be provided for TALK, LISTEN, and DOOR operations. The speaker/microphone shall be a 3 1/2", high sensitivity type with voice-frequency response. Pigtail or plug-in terminal connections shall be provided.

System Operation:

The visitor, by pressing the appropriate button on the entrance panel, causes an electronic tone signal to be heard at the IR-086S. Resident responds by pushing the TALK button while speaking to the caller, the LISTEN button while waiting for a reply, and the DOOR button to allow entry to the building.