


SELECTIVE CALL INTERCOM SYSTEM



Intermix Operation:

- Multi-Master
- Master to Remote
- Optional All-Call
- For Office or Home

TEK-SELECT™

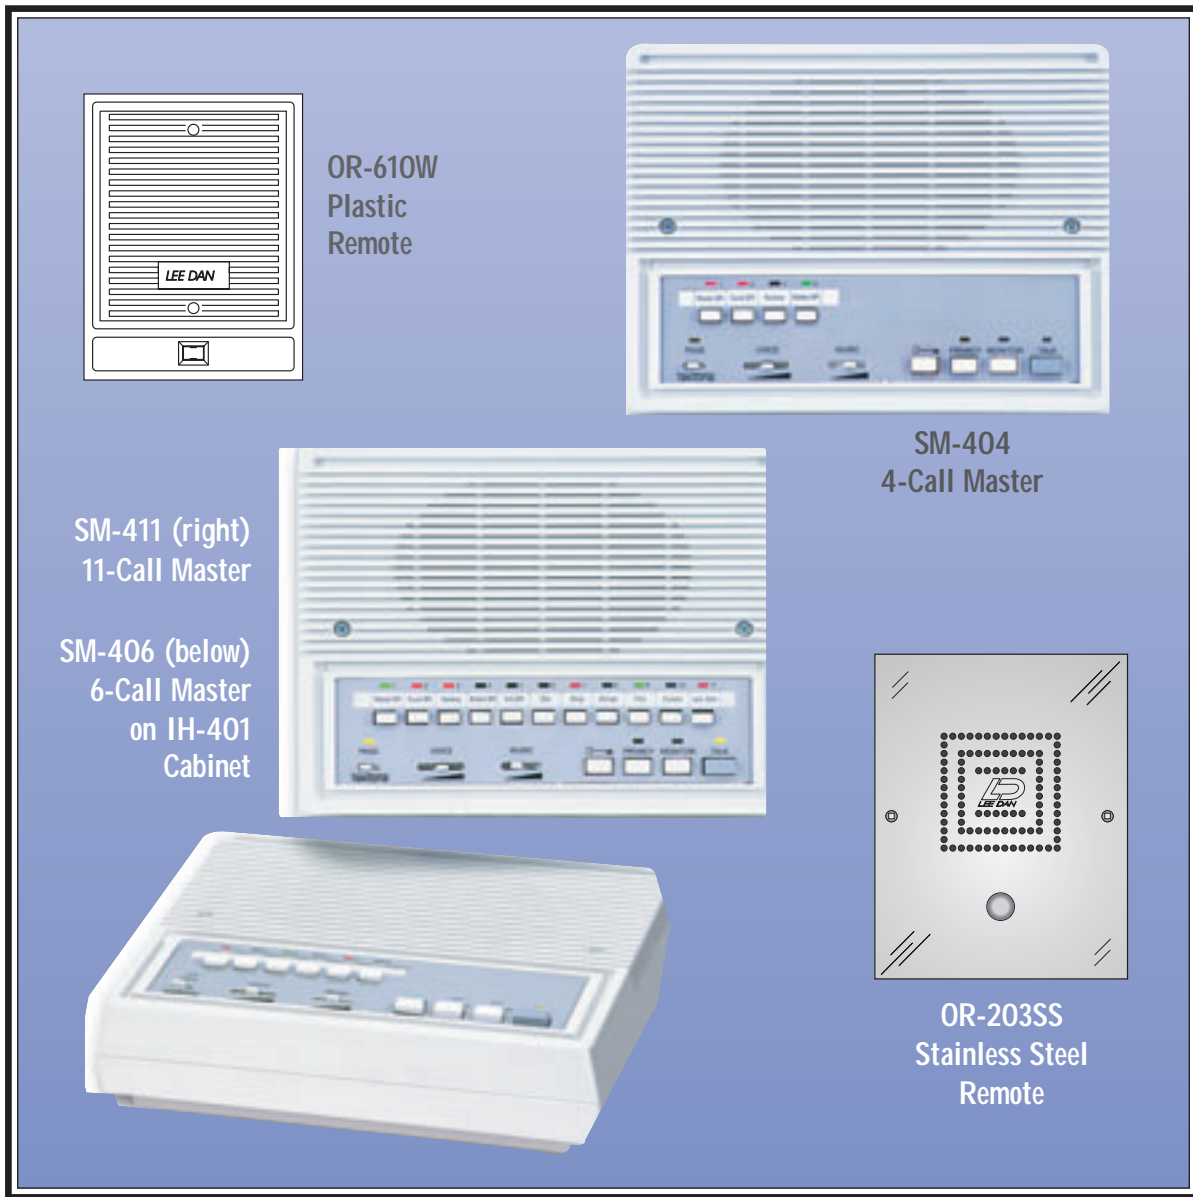

Control Entry & Add Security to:

**Businesses • Homes, Home/Offices • Day Care Centers
Warehouses • Loading Docks • Jewelry Stores**

MIX & MATCH MASTERS & REMOTES FOR THE BEST SYSTEM TO FIT YOUR NEEDS

TEK-SELECT™ Selective Calling Allows Instant, Controlled Communications!

TEK-SELECT™ lets you mix and match the best components for a system that's perfect for your needs.

Configure a System That's Best for You:

- All Master • Master to Remote • Intermix Masters & Remotes

Standard Master Features:


- Controls Talk & Listen Functions.
- Lamp & Tone to Indicate Who's Calling.
- Separate Monitor Channel.
- Privacy Switch, to Prevent Eavesdropping.
- Built-In Door Release (single door).
- Dip-Switch Setable Functions (Tone, LED Time-out, etc.)

Popular Options:

- All-Call, using RY-401.
- Selective Door Release, using RY-400(s).






Wiring Requirements (Excludes D.O., Music, RY-400, RY-401):

- Remotes: 1 Common + 1 Selective • Masters: 7 Common + 1 Selective

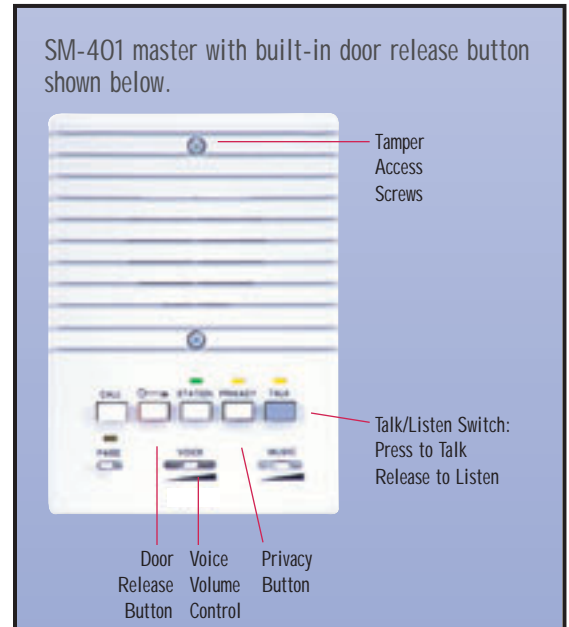

Model	Description	Height	Width	Depth
SM-411	11 Call Tek-Select™ Master Station	7-1/8	9-1/4	2
SM-406	6 Call Tek-Select™ Master Station	7-1/8	9-1/4	2
SM-404	4 Call Tek-Select™ Master Station	7-1/8	9-1/4	2
SM-401	1 Call Tek-Select™ Master Station	6-7/8	5	1-1/2
OR-510	Alum/plastic Remote w/button & capacitor.	6-7/8	5	1-1/2
OR-203	**All Metal version of OR-510.	6-7/8	5	1-1/2
OR-203BR	**Lacquered Polished Brass type OR-203.	6-7/8	5	1-1/2
OR-203SS	**Stainless Steel version of OR-203.	6-7/8	5	1-1/2
OR-403S	**Surface mount version of OR-203SS.	6-7/8	5	1-1/2
OR-101	**Outside Alum. Remote w/weather-resistant mylar cone speaker, no call button	6-7/8	5	1-1/2
OR-610W	Outside Plastic Remote w/weather-resistant mylar speaker and call button. White.	5-1/4	4	1-1/4
IR-100B	**Inside Remote station, no call button.	6-7/8	5	2-3/8
IR-501B	Same as IR-100B with call button.	6-7/8	5	2-3/8
RH-15	**Round patio horn (8 ohm, 12 watt max., 8 watts nominal) with talk-back, white.	5-1/4	5-1/4	6-5/8
I5-MFD	15-MFD capacitor for use with ** remotes.	5-1/2	4	1-3/4
DO-001	Heavy duty electric door release. Reversible mortise type (16-24V AC or DC).	5-7/8	1-1/4	1-5/16
IH-401	White Desk/Surface box for SM-411/406/404.	7-1/8	9-1/4	2
IH-400A	White Desk/Surface mount box for SM-401 masters, or IR-100B/IR-510B remotes.	6-7/8	5	1-3/4
IH-110R	Flush mounting ring for SM-411/406/404	5-7/8	8-1/4	1-7/8
IH-102	Flush mount drywall ring for IR & OR* stations.	6	4-3/4	1/2
IH-101	Flush steel back box for IR & OR* stations.	5-1/2	4	1-3/4
OH-700	Surface box for OR* stations. Black.	6-7/8	5	1-3/4
PK-400	Tek-Select Power Supply. 1 Req'd per system.			
RY-400	Optional 3 D.O. Relay adaptor. Allows selective door release.			
RY-401	Optional All-Call Relay module. 1 Req'd per system for all-call feature.			
PS-30A	Pigtail transformer. (120VAC/16VAC-30VA, 24VAC-20VA) UL listed.			
SC-1	'Scrulox' screwdriver. For special tamper-resistant screws supplied w/stations.			
12LDJ	12 conductor, No. 22 AWG cable. For 4 Masters or fewer (includes 1 spare).			
2PRJ	4 conductor, No. 22 AWG cable. For Master to Remotes (includes 2 spares).			
4PRJ	8 cond. No. 22 AWG cable. Expansion cable used with 12LDJ for more masters.			

*Except OR-403S, which surface mount to wall. **Requires 15-MFD capacitor.

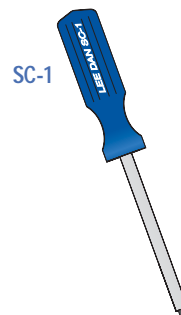

Toll-Free: 800-231-1414

Phone: 631-231-1414

Fax: 631-231-1498

www.LEEDAN.com

155 Adams Avenue

Hauppauge, NY 11788-3699

Distributed by: _____