

Not U.S.P.S. Approved



MODEL 5770 (RETROFIT ONLY)

Each mailbox consists of 3 to 10 compartments enclosed within a wall box. The wall box and compartments are constructed of heavy gauge galvanized and chromated steel providing both durability and resistance to rust. Access for loading is gained by unlocking a control lock and pivoting the compartments forward.



Model 5770-5
(For replacement only)

COMPARTMENT SIZE:

- 15" high x 3 1/2" wide x 4" deep


5770 SERIES ROUGH OPENING WIDTH FORMULA.

Multiply total doors wide by 4 inches..... =
 Multiply total units by 2.125 inches..... = + _____
 Minus - 1.250 inches
 Total rough opening width = _____ inches


MOUNTING METHODS

- Recessed only

SINGLE ROW MOUNTING

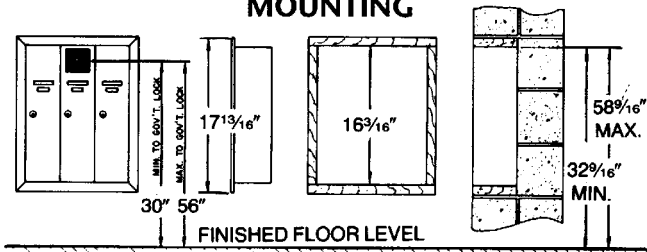

DOUBLE ROW MOUNTING

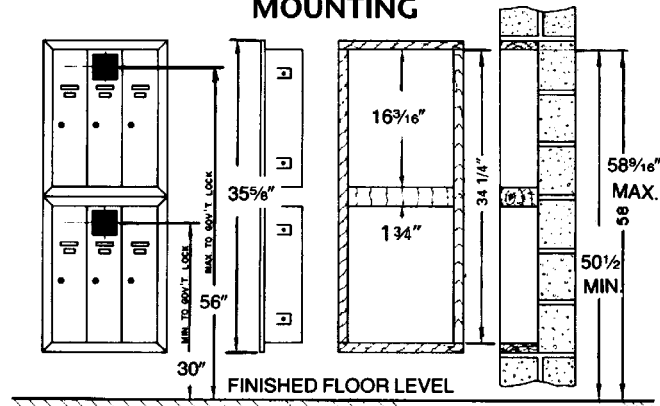

SINGLE ROW ROUGH WALL OPENING HEIGHT 1' 4 3/16"		DOUBLE ROW ROUGH WALL OPENING HEIGHT 2' - 10"		
Total No. of Tenants		Total No. of Tenants	Arrangements and No. Boxes in Each Row	Opening Width
3		6	3	1' - 0 7/8"
4		8	4	1' - 4 7/8"
5		10	5	1' - 8 7/8"
6		12	6	2' - 0 7/8"
7		14	7	2' - 4 7/8"
8		16	8	2' - 8 7/8"
9		18	9	3' - 0 7/8"
10		20	10	3' - 4 7/8"

Note: Minimum rough wall depth for fully recessed units — 4 1/8"



Model 5621
Key Keeper with 24" Chain