



1500 **STAND ALONE**

KEYPADS ACCESS CONTROL

www.leedan.com info@leedan.com Toll-Free: 800-231-1414



flush mount



surface mount

1503 or 1506



1504 with intercom



1503 non-lighted



lighted keypads
for easy night time operation



keypad
User's enter their 4-5 digit unique PIN (personal identification number) to gain entry



intercom
model 1504 combines the keypad with an intercom substation that can be used with some existing intercom systems




economical
non-lighted option has 2 access codes

- Rugged steel cabinet with stainless steel faceplates
- Metal keypads
- PIN (Personal Identification Number) codes are programmable from the keypad
- Programmable "hold" code
- EEPROM memory will not lose programmed codes during power outages
- Stand-alone keypads can control 2 doors or gates (1506 only)
- Slave keypad capability for controlled entry / exit applications (1506 only)
- 1504 combines an intercom with the 1503 or 1506 keypad
- Request to exit input

FEATURES




ACCESS CONTROL SOLUTIONS

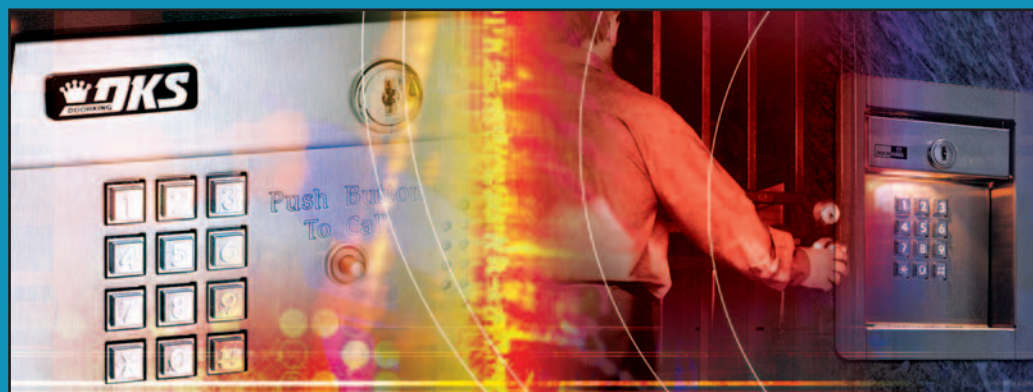



DKS 1500 Series Keypads provide access control for virtually any application where stand-alone digital code entry is desired. These vandal resistant keypads use stainless steel faceplates, galvanized steel sub-plates and are housed in a rugged steel cabinet. Standard style units can be surface or post mounted and flush mount units are designed to be recessed into a wall or column. The "1504 series" adds an intercom sub-station that can be connected to a master intercom system.

www.leedan.com info@leedan.com Toll-Free: 800-231-1414

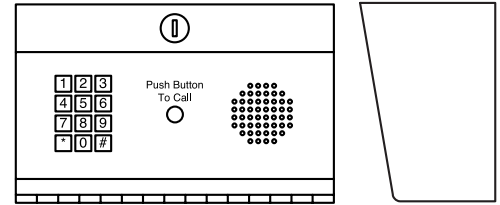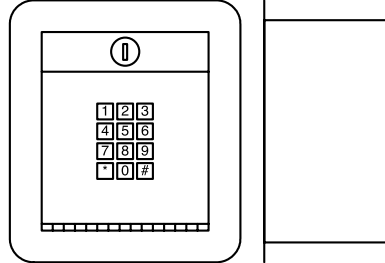

1503/06 Surface

5.25" W x 6.25" H x 4.375" D
285mm W x 330mm H x 120.6mm D

1503 Surface non-lighted

4.5" W x 5.375" H x 5.25" D
114mm W x 136mm H x 285mm D

1503/06 Flush

keypad with trim ring:
7.125" W x 8.375" H x 4" D
305mm W x 343mm H x 63.5mm D
rough-in box:
5.625" W x 7" H x 4" D
305mm W x 343mm H x 63.5mm D

1504 Intercom

10" W x 6.25" H x 5.25" D
336.5mm W x 381mm H x 88.9mm D

1503

Output

Form C dry contact relay
30 V 1 amp maximum

Capacity

Two 4-digit momentary codes
Two 5-digit momentary codes
Two 4-digit hold open codes

Mounting

Surface / post mount
Flush mount

Standard Features

Ideal for doors or gates
Add or delete individual codes from the keypad
"Hold" code to latch open a door or gate
EEPROM memory
Basic digital entry for economical applications
Non-lighted version available (not shown)
4.5" W x 5.375" H x 5.25" D
surface mount only

Electrical Requirements

12 to 24 volt AC or DC power

Operating Temp

-10°F to 115°F (-23°C to 46°C)

Shipping Weight

8-20 lbs (3.6-9 kg)

Warranty

2 year limited warranty

1506

Output

Two form C dry contact relays
30 V 1 amp maximum

Capacity

10, 50, 100, 250, 500, or 1000 4-digit codes
Six 5-digit codes

Mounting

Surface / post mount
Flush mount

Standard Features

Ideal for doors or gates
Add or delete individual codes from the keypad
"Hold" codes to latch open a door or gate
EEPROM memory

Advanced Features

Time zone inputs
Slave keypad capability

Electrical Requirements

16 volt AC. Power transformer included

Operating Temp

-10°F to 115°F (-23°C to 46°C)

Warranty

2 year limited warranty

1504

Combines the 1503 or 1506 keypad (and the features of each as listed above) into a common housing with an intercom sub-station.

A master intercom station (not provided) is required to establish communication with the 1504. (May not be compatible with some intercom systems.)

Mounting

Surface / post mount

Operating Temp

-10°F to 115°F (-23°C to 46°C)

Warranty

2 year limited warranty

Distributed by:

DOORKING®, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2005 All Rights Reserved. Product specifications may change without notice. Rev. 9/05

MEMBER:

