



1808 AUTO DIALER TELEPHONE INTERCOM SYSTEM

www.leedan.com info@leedan.com Toll-Free: 800-231-1414



surface mount
with built in
directory/
message window



surface mount



led lighting
illuminates keypad and directory



flash entry codes
allow entry on a single day only, then
automatically deactivate themselves



dtmf tone output
allows these systems to be used
with PBX, KSU and telephone
systems with auto-attendants



modular
design makes installation and
service easy

- Provides visitor access control in residential or commercial applications
- Visitors use the 1808 to communicate with a resident, who can then grant or deny them access from their touch-tone phone
- Provides service for up to 1000 residents
- Programmable directory codes can be set from 1 to 4 digits
- Ideal for residential, multi-home applications with limited space, or do not require a directory, or where a separate directory exists



FEATURES

ACCESS CONTROL SOLUTIONS



The model 1808 is an ideal telephone entry system that is suited for applications that have limited space and can be used in residential as well as commercial applications. Visitors are easily identified by voice communication and can be granted or denied access directly from a touch-tone telephone. With the small built in directory option, this system is ideal for small, multi resident applications.

www.leedan.com info@leedan.com Toll-Free: 800-231-1414

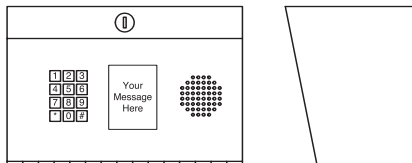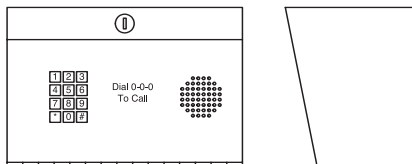

1808 Surface

with and without directory/message window

11" W x 7.5" H x 6.5" D

27.9cm W x 19cm H x 16.5cm D

1808 Specs

Communication

True full duplex
Hands free

Mounting Styles

Surface mount with lighted key pad

Capacity

125, 500 or 1000 phone numbers,
10 area codes
4 digit entry codes same as system memory
5 digit entry codes = 6

Door/Gate Control

Two relays allow for control of both a vehicular gate and a pedestrian gate

Programming Methods

System keypad
Touch-tone telephone

Advanced Features

Programmable directory codes can be set from 1 to 4 digits in length
10 & 11 digit dialing capability
Built in clock/calendar
Time clock has its own backup power source
Entry code time zones
Four hold-open time zones
Flash entry codes
DTMF tone output allows for use with KSU, PBX and systems with an auto-attendant
Two special inputs can be programmed for relay activation or dial-out function
Time zone restrictions on selected entry codes

Options

Available with small built-in directory (not lighted)
Heater kit - recommended when temperatures routinely fall below 10°F (-12°C)
Camera Ready:
Optional B&W or Color CCTV camera*
*may require additional CCTV equipment

Operating Temp

10°F to 145°F
-12°C to 62°C
Optional heater kit available for colder climates

Electrical Requirements

16 VAC, 20 VA System power (250 ma)
U.L. listed power transformer provided
Ringer equivalence: 0.0A Jack Type: RJ11C or W

Safety Standards

FCC (US) DUF6VT-12874-OT-0
DOC (CAN) 1736 4507 A
Complies with UL 294
ETL Listed

Shipping Weight

Approximately 15-20 lbs (7-9 kg)

Warranty

2 year limited factory warranty

Distributed by:

DOORKING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2006 All Rights Reserved. Product specifications may change without notice. Rev. 4/06

MEMBER:

