


MODEL 1834 PC Programmable System

The model 1834 is an ideal telephone entry system that is suited for a wide variety of applications. The built-in electronic directory makes it a complete all-in-one compact unit. The large A and Z scroll buttons make it easy for visitors to locate the resident and our unique one-touch CALL button simplifies the calling process.

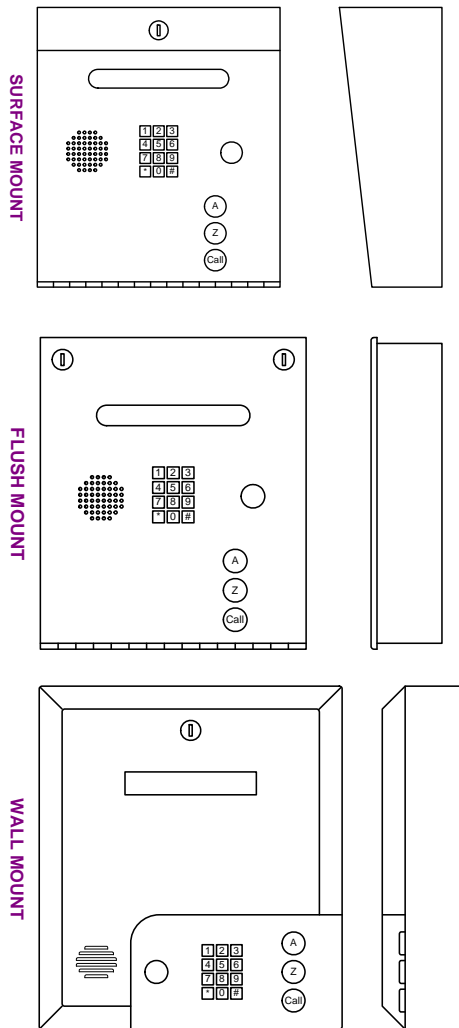

Standard Features

- Full-Duplex Communication
- Programmable directory codes (1-4 digits)
- 10 and 11 digit dialing capability
- Remote Account Manager software
- Live Transactions
- Holiday Schedule
- Database import/export capability
- Transaction buffer stores last 8000 events
- 2 relays for door/gate control
- Single-line electronic display uses super-twist LCD with ½-inch characters
- Built-in postal lock provision
- EEPROM Memory
- 2-year warranty

Options

- Available in surface, flush or wall mount styles.
- ADA Compliant handset kit available on surface or flush mount styles only. P/N 1807-012
- Stainless Steel housing available on surface mount styles only.
- Gold-plated faceplate available on surface and flush mount styles only.
- Fluorescent light kit.
- Heater Kit – recommended when temperatures routinely fall below 10°F (-12°C).
- CCTV camera (may require purchase of additional CCTV equipment).
- Mounting posts.

Dimensions	Shipping Weight	Regulatory	Power
Surface Mount: 13"H x 11.25"W x 4.75"D		FCC (US): DUF6VT-12874-OT-T	16 VAC, 20 VA, 250 ma Ringer Equivalence: 0.0 A Jack Type: RJ11C or W
Flush Mount: 13.5"H x 12"W x 2.5"D		DOC (CAN): 1736 4528 A	
Wall Mount 15"H x 13.25"W x 3.5"D		ETL Listed	

DOORKING TELEPHONE ENTRY SYSTEMS

Rev 6/09

1834 Telephone Entry Systems					
P/N	Description	Memory Options (Note 3)			
		125 (1834-152)	250 (1834-153)	500 (1834-154)	3000 (1834-157)
1834-080	Surface Mount, Hands Free				
1834-081	Surface Mount, Hands Free with Gold Plated Face Plate (Note 2)				
1834-084	Flush Mount, Hands Free (Note 1)				
1834-085	Flush Mount, Hands Free with Gold Plated Face Plate (Note 1, 2)				
1834-089	Wall Mount, Hands Free (Note 2)				

Connection Options for Data Transfer		
P/N	Description	
1815-740	Wireless Modem Assembly Line of sight distance approximately 500 feet (further with high gain antenna).	
1508-055	RS232 to RS422 Kit Connects RS232 data port to PC using a Cat5 (not included) cable (4000 ft. max).	
1815-037	USB to RS-232 Adapter	
1818-040	RS-232 Cable	
1815-741	High Gain Antenna Kit (increases range of 1815-740).	

Accessories (Refer to indicated page for further description)		
P/N	Description	
2600-584	Heater Kit (pg 34)	
1807-012	Handset Conversion Kit (pg 34)	
1803-150	Surface Mount Trim Ring (pg 34)	
1814-165	Flush Kit - Stainless Steel (pg 34)	
1814-166	Flush Kit – Gold Plated (pg 34)	
1814-152	Flush Ring – Stainless Steel (pg 34)	
1810-102	Stainless Steel Case (pg 34)	
1720-080	Fluorescent Light Kit (pg 31)	
1812-145	CCTV Camera Kit (pg 36)	

To Order: Select the unit AND a memory option.

Notes:

- (1) Requires flush mounting kit. Flush mount units are not designed for outdoor applications where they are exposed to direct rain or snow.
- (2) Hand set not available.
- (3) If the 1834 is sharing database files with other 1834 systems, you must match the memory size of the 1834 with the memory installed in the system that you are going to share files with. If matching this telephone entry system with an older system with 25, 75, 1000 or 2000 memory, refer to page 37.