


1812 HEATER KIT

This kit is designed for the 1812 model telephone intercom system. For climates where temperatures routinely drop below 40°F (4°C). An automatic thermostat will control temperature inside the housing.

Kit Includes:

- Heater assembly in mounting bracket with thermostat.
- (2) two magnets to mount heater.
- (2) wire nuts.
- 16.5 VAC 20 VA transformer.

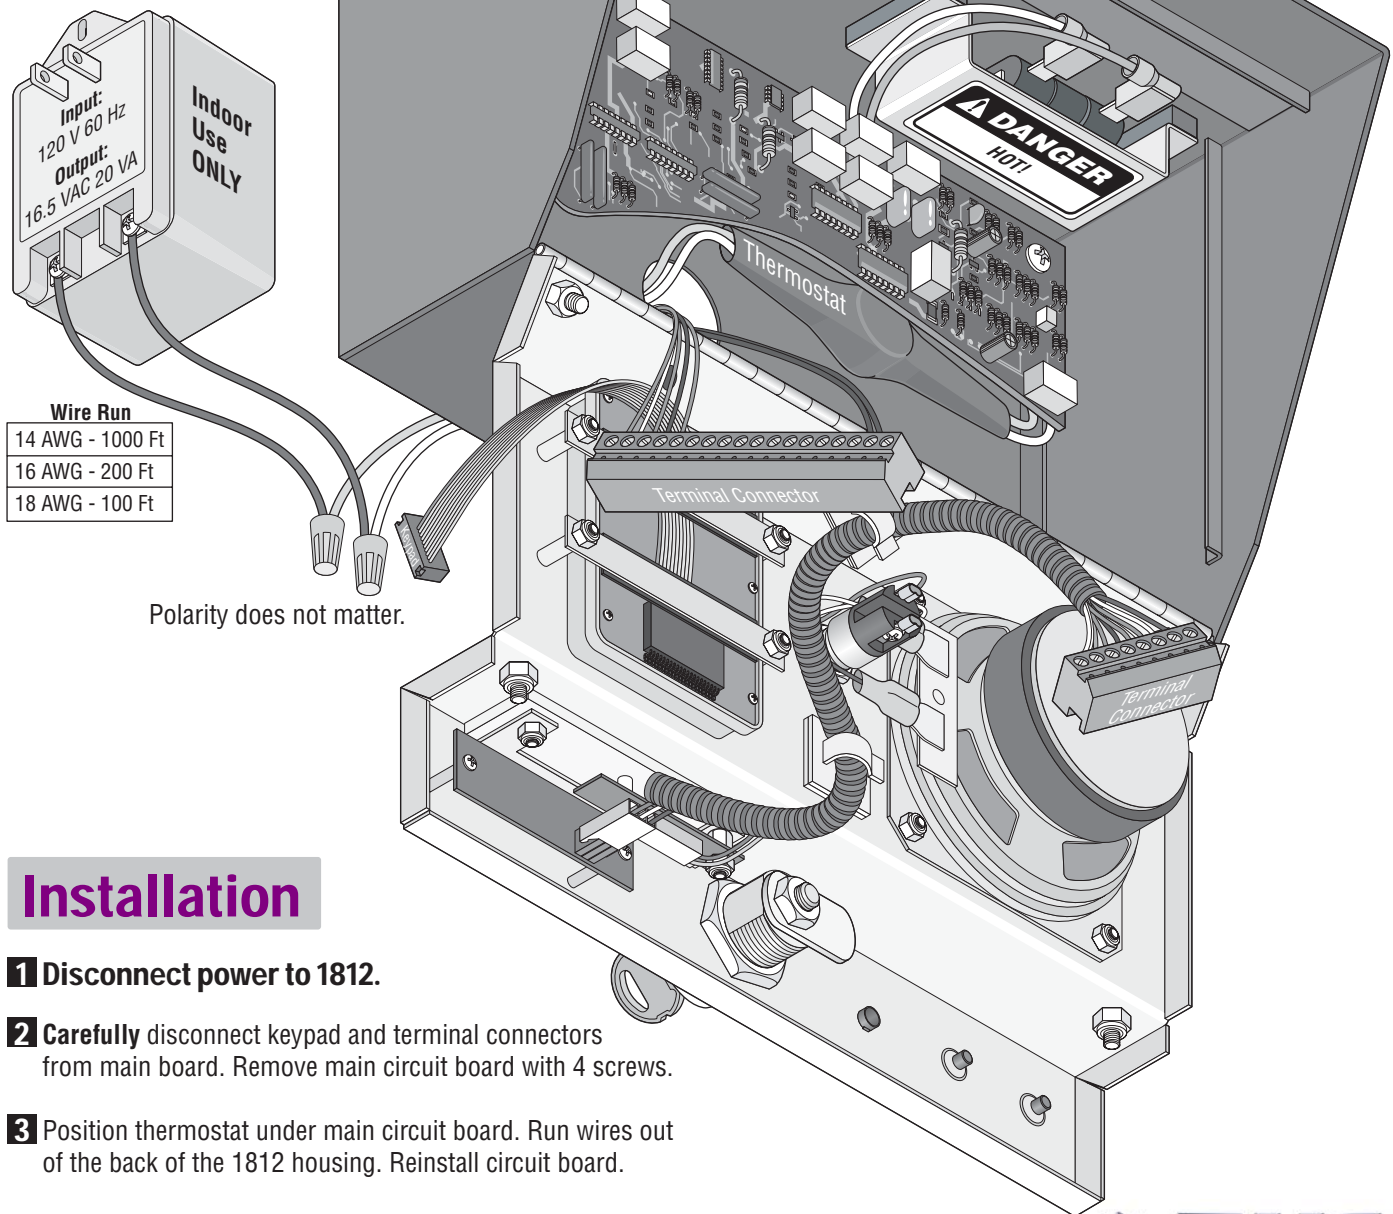

Installation

- 1** Disconnect power to 1812.
- 2** Carefully disconnect keypad and terminal connectors from main board. Remove main circuit board with 4 screws.
- 3** Position thermostat under main circuit board. Run wires out of the back of the 1812 housing. Reinstall circuit board.
- 4** Mount heater assembly in position shown with 2 magnets. Make sure heater does not touch circuit board.