


MODEL 9150 Slide Gate Operator

For gates up to 45-feet long, 1500 Lb. maximum gate weight

The model 9150 slide gate operator is designed to operate vehicular sliding gates in residential commercial and industrial applications. The operator has a full feature circuit board and includes chain brackets, hardware and 20-feet of #40 chain.

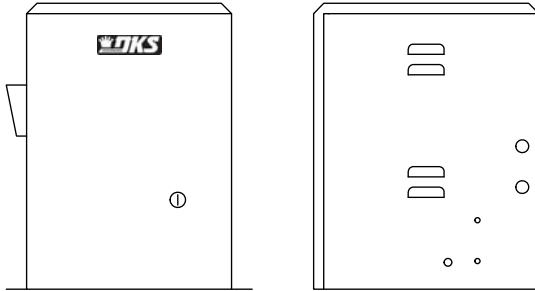

Standard Features

- 1/2 HP, for gates up to 30-feet, 1000 Lb (800 Lb with convenience open option)
- 1 HP, for gates up to 45-feet, 1500 Lb (1300 Lb with convenience open option)
- Self-adjusting, maintenance free limits
- Programming switches allow you to set desired mode of operation
- Fail-safe design
- Partial-open feature
- Anti-tailgating feature
- Gate Tracker reporting output provides operator data to access control system* (*DKS systems with card access only)
- Auto-close timer
- Plug-in loop detectors
- 2 convenience outlets
- 5-year limited warranty
- 10°F to 140°F (-12°C to 62°C)

Options

- DC Powered convenience open (Fail-safe operators only)
- Fail-secure keyed release
- Nickel plated chain
- Stainless steel chain
- Post mount base plate
- Gate operator control stations
- Heater kit (recommended when temperature routinely falls below 32°F (0°C).
- Plug-in loop detectors
- Slide gate accessories
- **Secondary entrapment prevention devices are required with this gate operator. Refer to Section 3, Pg 9-11 for selection of devices.**

Dimensions	Shipping Weight	Class	Power
9150 15"W x 24"H x 16.5"D	165-185 Lbs.	Class: I, II, III, IV	115 VAC, 60 Hz 1/2 HP: 5.4 A; 1 HP: 9.7 A
			230 VAC, 60 Hz 1/2 HP: 2.7 A; 1 HP: 4.9 A
			460 VAC, 60 Hz 1/2 HP: 1.4 A; 1 HP: 2.5 A

DOORING VEHICULAR GATE OPERATORS

Rev 6/09

9150 Slide Gate Operators		
P/N	Description	
9150-084	1/2 HP Slide Gate Operator, 115 VAC	
9150-085	1/2 HP Slide Gate Operator, 230 VAC	(Note 2)
9150-090	1/2 HP Slide Gate Operator, 460 VAC	(Note 2)
9150-086	1/2 HP Slide Gate Operator w / DC convenience open, 115 VAC	(Note 3)
9150-087	1/2 HP Slide Gate Operator w / DC convenience open, 230 VAC	(Note 2, 3)
9150-091	1/2 HP Slide Gate Operator w / DC convenience open, 460 VAC	(Note 2, 3)
9150-080	1 HP Slide Gate Operator, 115 VAC	
9150-081	1 HP Slide Gate Operator, 230 VAC	(Note 2)
9150-088	1 HP Slide Gate Operator, 460 VAC	(Note 2)
9150-082	1 HP Slide Gate Operator w / DC convenience open, 115 VAC	(Note 3)
9150-083	1 HP Slide Gate Operator w / DC convenience open, 230 VAC	(Note 2, 3)
9150-089	1 HP Slide Gate Operator w / DC convenience open, 460 VAC	(Note 2, 3)
Accessories		
P/N	Description	
9409-010	DoorKing plug-in 2-channel detector. Use with DKS operators only.	
9410-010	DoorKing plug-in single channel detector. Use with DKS operators only.	
1601-154	Heater Kit Heater kit for operators installed in cold weather environments. Built-in fan and thermostat.	
2600-495	Base plate to post mount the operator. Posts not included.	
2600-442	20-foot #40 chain and two master links.	
2600-865	Fail-Secure Lock Kit	(Note 1)

Notes:

- (1) Changes operator from fail-safe to fail-secure.
- (2) These operators use a step-down transformer to achieve 115 VC operating voltage.
- (3) DC convenience open option is not available with fail-secure operators.