


## MODEL 9210 1-HP Slide Gate Operator


*For gates up to 100-feet long, 3000 Lb. maximum gate weight*

The model 9210 slide gate operator is designed to operate vehicular sliding gates used in limited (Class III) or restricted (Class IV) access industrial applications only. The operator has a full feature circuit board and includes chain brackets, hardware and 20-feet of #50 chain. As an option, #60 chain is available for very large and heavy gates. When used to operate gates weighing over 1500 Lb., the 9200-135 pedestal is required.

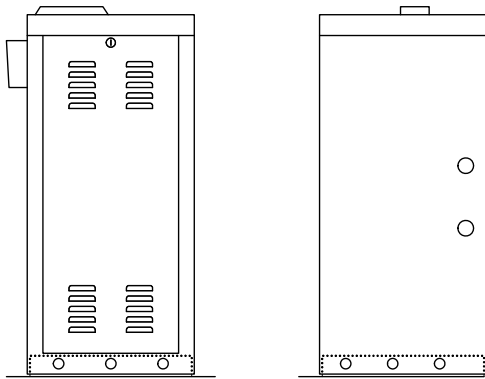

### Standard Features

- 1 HP, for gates up to 100-feet, 3000 Lb
- Direct driven manual limits
- Programming switches allow you to set desired mode of operation
- Fail-secure design
- Anti-tailgating feature
- Gate Tracker reporting output provides operator data to access control system\* (\*DKS systems with card access only)
- Auto-close timer
- Plug-in loop detectors
- 2 convenience outlets
- 5-year limited warranty
- 10°F to 140°F (-12°C to 62°C)

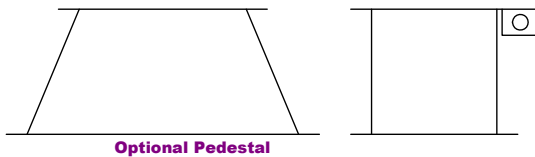

Optional Pedestal

### Options

- Heavy-duty pedestal style mounting stand (recommended for gates over 30-feet to allow use of chain support rail). **Must be used with gates weighing over 1500 Lb.**
- Gate operator control stations
- Heater kit (recommended when temperature routinely falls below 32°F (0°C).
- Plug-in loop detectors
- Slide gate accessories
- **Secondary entrapment prevention devices are required with this gate operator. Refer to Section 3, Pg 9-11 for selection of devices.**

Dimensions	Shipping Weight	Class	Power
9210 16"W x 34"H x 16"D	287-310 Lbs.	Class: III and IV	115 VAC, 60 Hz, 1 <sup>Ø</sup> 1 HP: 15.0 A
			208 / 230 VAC, 60 Hz 1 <sup>Ø</sup> 1 HP: 7.4 / 7.5 A
Pedestal 31.25"W x 12"H x 18"D	90 Lbs.		208 / 230 VAC, 60 Hz, 3 <sup>Ø</sup> 1 HP: 3.3 / 3.4 A

## DOORING VEHICULAR GATE OPERATORS

Rev 8/6/08

<b>9210 Slide Gate Operators with #50 chain</b>		
<b>P/N</b>	<b>Description</b>	
9210-080	1 HP, 115 VAC	
9210-082	1 HP, 208 VAC 1 <sup>Ø</sup>	
9210-084	1 HP, 230 VAC 1 <sup>Ø</sup>	
9210-086	1 HP, 208 VAC 3 <sup>Ø</sup>	
9210-088	1 HP, 230 VAC 3 <sup>Ø</sup>	

<b>9210 Slide Gate Operators with #60 chain</b>		
<b>P/N</b>	<b>Description</b>	
9210-081	1 HP, 115 VAC	
9210-083	1 HP, 208 VAC 1 <sup>Ø</sup>	
9210-085	1 HP, 230 VAC 1 <sup>Ø</sup>	
9210-087	1 HP, 208 VAC 3 <sup>Ø</sup>	
9210-089	1 HP, 230 VAC 3 <sup>Ø</sup>	

<b>Accessories</b>		
<b>P/N</b>	<b>Description</b>	
9409-010	DoorKing plug-in 2-channel detector. Use with DKS operators only.	
9410-010	DoorKing plug-in single channel detector. Use with DKS operators only.	
1601-154	<b>Heater Kit</b> Heater kit for operators installed in cold weather environments. Built-in fan and thermostat.	
2600-485	20-feet #50 chain and two master links.	
2600-448	20-feet #60 chain and two master links.	
9200-135	Heavy-duty pedestal mount	