



# 9150 VEHICULAR SLIDE GATE OPERATOR

• RESIDENTIAL • COMMERCIAL • INDUSTRIAL



- Electronic magnetic limits eliminate old style mechanical switches that can wear out, break or fail
- Automatic self-setting limits mean no limit switch adjustments – ever
- Safety – built-in mechanical and electronic reverse system
- Advanced microprocessor control board features programming switches to set the mode of operation required and has ports for DKS plug-in loop detectors to simplify wiring
- 5-year limited warranty



**entrapment detection**  
reverses gate when obstructed



**built in**  
power switch and reset switch



**fail-safe release**  
never be locked out (or in)




**unique design**  
allows easy access to all mechanical parts

ACCESS CONTROL **SOLUTIONS**

# 9150 VEHICULAR SLIDE GATE OPERATOR

## 9150 1/2 HP & 1 HP

15.25" W x 24.75" H x 16.75" D (38.7cm W x 62.8cm H x 42.5cm D)

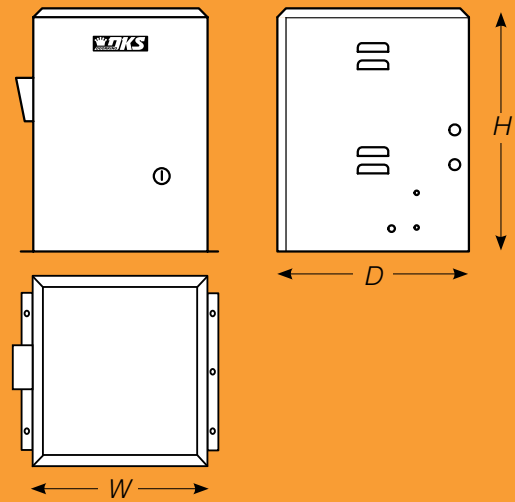

	CLASS OF OPERATION	MAX GATE LENGTH *	MAX GATE WEIGHT *	MOTOR	INPUT	OPTIONS
<b>9150 1/2 HP</b>	I, II, III, IV	30 Ft (9.1 m)	1000 Lbs. (453.6 kg)	1/2HP Continuous Duty AC Motor	115 VAC, 60 HZ, 5.4A 208 VAC, 60 Hz, 2.8A** 230 VAC, 60 Hz, 2.7A** 460 VAC, 60 Hz, 1.4A**	DC Powered Convenience Open Package †
<b>9150 1 HP</b>	I, II, III, IV	45 Ft (13.7 m)	1500 Lbs. (680.8 kg)	1HP Continuous Duty AC Motor	115 VAC, 60 HZ, 9.7A 208 VAC, 60 Hz, 5.0A** 230 VAC, 60 Hz, 4.9A** 460 VAC, 60 Hz, 2.5A**	DC Powered Convenience Open Package †

\* Assumes gate is on level ground, in good condition with properly adjusted hardware. Other external factors may affect the performance of the gate operator.  
When combined with convenience open option, 1/2HP max weight is 800 Lbs., and 1300 Lbs. with 1HP.

\*\* These operators use a step-down transformer to achieve 115 VAC operating voltage.

† Optional factory installed DC powered drive system provides an automatic method to open the gate when primary (AC) power fails.

## Technical Features

### Mechanical

Frame: G90 Galvanized steel to prevent rusting  
Cover: Steel cover is plated and painted  
Primary Reduction: Single cog belt  
Speed: Approximately 10 in/sec (254 mm/sec)  
Chain: Unit is shipped with 20-ft (6m) of #40 roller chain, chain brackets, hardware  
Fail-Safe release standard

### Options

Nickel or stainless steel chain  
Base Plate for post mounting  
Fail-Secure release kit

### Electrical

Automatic limit adjustment  
Auto-close timer 1-23 sec  
Selectable stop / reverse loop function  
Built in On / Off switch  
Built in alarm reset switch  
Programming switches allow you to set desired mode of operation  
Partial-open and anti-tailgating features  
Two 115 VAC convenience outlets for accessory transformers  
Automatically assumes fail-safe mode when an entrapment condition exists  
Ports for plug-in open and reverse loop detectors. DKS plug-in detectors only  
Gate Tracker reporting output provides operator data to access control system (DKS 1833, 1835, 1837, 1838 only)

### Miscellaneous

Environmental: 10°F to 140°F (-12°C to 62°C)  
Thermostatically controlled heater kit recommended for colder environments  
External entrapment/obstruction sensing devices must be used with this operator  
Shipping weight approximately 125-185 Lbs (67.7-83.9 kg)



Access Control Solutions since 1948

Distributed by:

*Lee Dan Communications, Inc.*  
[www.leedan.com](http://www.leedan.com)  
[info@leedan.com](mailto:info@leedan.com)  
Toll-Free 1-800-231-1414

MEMBER:



DOOR KING, INC.

© 2014 All Rights Reserved. Product specifications may change without notice.  
Rev. 2/14