

GH-1KD / GH-1KDS

Audio/Video Tenant Station for the GH Series

GH-1KD



GH-1KDS



DESCRIPTION:

The GH-1KD(S) is an audio/video tenant station for the GH series Multi-Unit entry system. It is equipped with a Talk, Door Release, and optional service button. When a visitor calls, the tenant stations rings and video is present. The call is answered by one touch of the Talk button.

The GH-1KD(S) also has the capability of calling the Concierge/Security Guard stations(s), turning on a light while speaking with a visitor at the entrance, receiving an emergency tone from a panic call station, and releasing a door.

The GH-1KD(S) is designed to be surface mounted and has a slim, streamlined design. Up to four units can be used in the same tenant location (2 audio/video and 2 audio only).

Communication is hands-free at the entrance station when a tenant answers the call, and is either VOX hands-free or push-to-talk at the tenant station when speaking with the visitor.


FEATURES:

- Hands-free audio communication
- Door release to the door where communication is established
- Call to Security Guard / Concierge station
- Optional individual doorbell rings unique tone, notifying resident that someone is at their door.
- Optional activation of outside light while talking to entrance station
- Optional connection of panic call station (GFK-PS), alerting with tone and call to Concierge
- Entrance monitoring
- Separate volume controls for call tone and communication
- Optional handset for privacy for GH-1KD only (GH-HS)
- Simple 2 separate pair common bus wiring (2 conductor for audio, 2 conductor for video)
- Surface mounts to wall on 1-gang box or ring
- ABS plastic construction

GH-1KD / GH-1KDS

Audio/Video Tenant Station for GH Series

FEATURE CALL-OUTS:

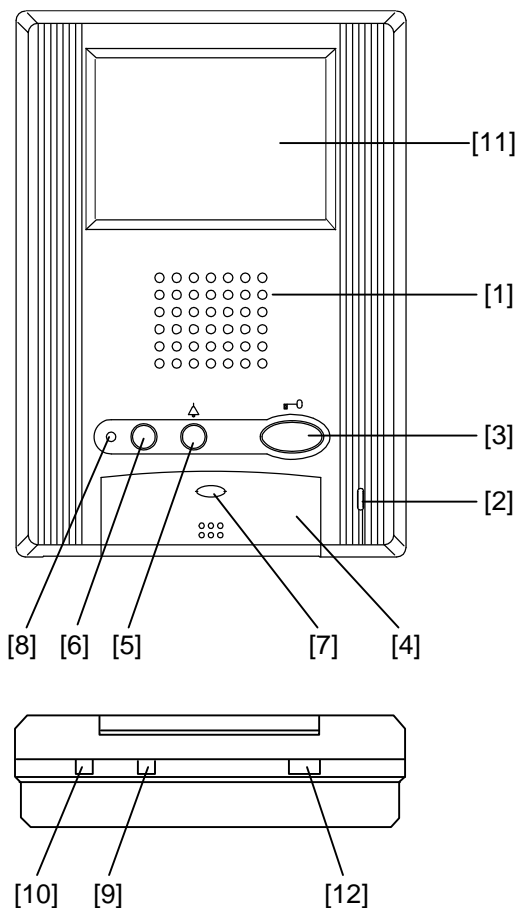

GH-1KD with optional desk stand:
 Model MCW-S/A (adjustable to 45° or 60° angle)



FEATURE CALL-OUT DEFINITIONS:

- [1] Speaker
- [2] Microphone
- [3] Door release button
- [4] Talk button
- [5] Light button / Security guard station call button
- [6] Service button (option)
The service button is standard equipment with the GH-1AD-SB.
- [7] Talk LED
- [8] Call tone off LED
- [9] Receive volume control
- [10] Call tone volume control
- [11] Video monitor 3.5 inch color LCD
- [12] Monitor brightness control

SPECIFICATIONS:

- Power Source: Supplied by system
- Call: Varying ring tones from entrance panel, concierge, or doorbell
- Communication: Hands-free (VOX) after TALK button is pressed once, or push-to-talk
- Capacity: Max. 4 tenant stations per resident location (2 Audio/Video, 2 audio only)
- Wire: Two 2-conductor cables, PE insulation, common bus
Audio Wire: Aiphone #872002
Video Wire: Aiphone #871802
- Wiring Distance: GH-VBC to farthest Tenant (Video line): 500' with 18AWG
- Talk Path: Single channel with privacy
- Color: GH-1KD - White
GH-1KDS - Silver
- Operating Temp: 32 – 104° F (0 ~ 40° C)
- Dimensions (HxWxD): 6-7/8" x 4-15/16" x 1-1/4"
(175 x 125 x 32 mm)
- Weight: 0.9 lbs (400g)